


Skyhook Flashing Instructions

SKYHOOK FLASHING ACCESSORIES

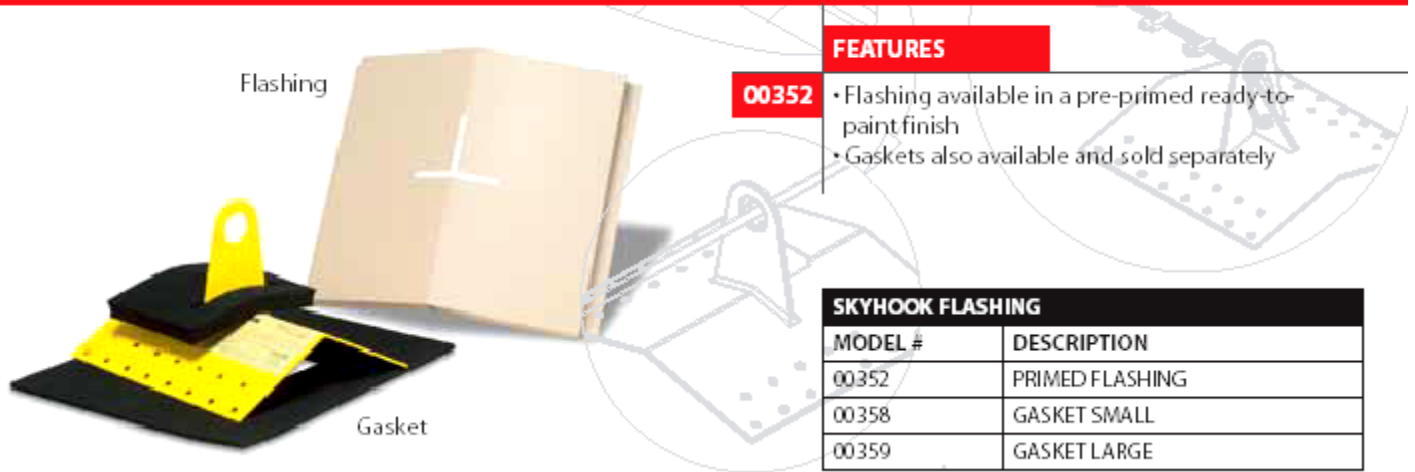

FEATURES

00352

- Flashing available in a pre-primed ready-to-paint finish
- Gaskets also available and sold separately

APPLICATIONS:

- Works with Skyhook Anchors 00310-00340
- 26ga. metal flashing is designed specially for Skyhook
- Wood or metal substrate construction

FEATURES:

Primer finish allows each painting to match roof finish

Lightweight but durable

Neoprene large and small gaskets (sold separately) help provide weather/moisture vapor and help facilitate caulking around tab.

PROPER USE:

Paint the metal flashing before installation.

Skyhook flashing is installed by placing 4 screws, one in each corner of horizontal flange of the flashing, through the flashing and roofing material directly to the roof decking.

If the optional Gasket Large (00359) is used, install it under the Skyhook before the anchor is installed.

If the optional Gasket Small (00358) is used, install it over the installed anchor, around the Skyhook upright, between the metal flashing and the Skyhook unit.

Apply caulking around the upright after the metal flashing is screwed into the decking to create a watertight seal.

GUARDIAN
FALL PROTECTION

26513 79th Ave. S.
Kent, WA
800-466-6385
www.guardianfall.com