




BMR TROLLEY ANCHOR

Part#	Description	Flange Size	Flange Thickness	Flange Use	Weight
00215	BMR Trolley Anchor	3" - 10"	0.9"	Bottom only	7.70

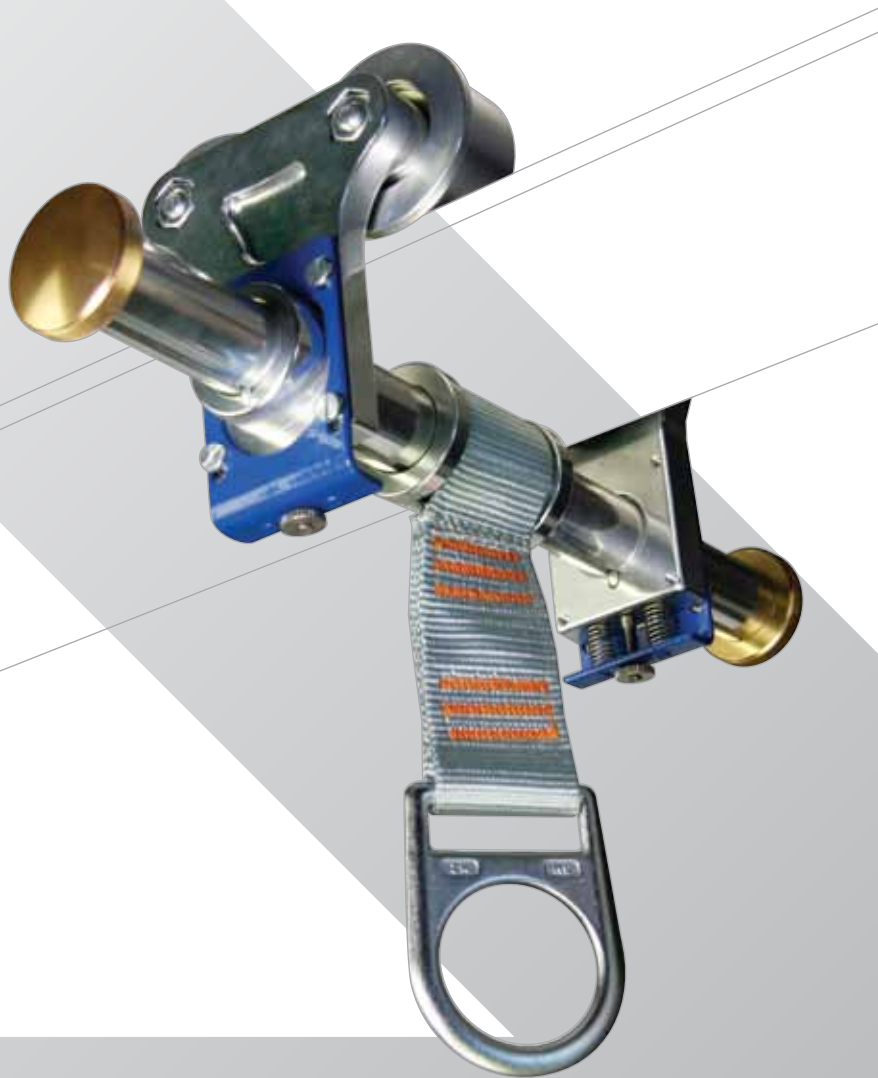

BMR Trolley Anchor (00215) ↘

The BMR Trolley Anchor is to be used as part of a personal fall protection system. It is intended to be used as an anchorage point with either a shock-absorbing lanyard or a self-retracting lifeline (SRL) for fall arrest, or with a positioning lanyard for fall restraint.

This unit should not be used for material handling or any use other than that of a fall protection anchorage device. Only one person may use the BMR Trolley Anchor at a time with a combined weight (including tools and other equipment) of 310 lb.

- Free moving rollers
- Web/D-Ring connection point
- Easy pin adjustment
- Cannot be used for material handling
- Spring Material: Stainless Steel
- Load Bar Material: Aluminum Alloy 7075-T6
- Clamps (Jaws): Aluminum Alloy 7075-T6
- D-Ring Material: Steel Alloy SAE4140-Nickel Plating
- Webbing Material: Polyester
- Minimum Breaking Strength: 3,300 lb. (15 kN)