

## anchor points


| Part# | Description                      | Pitch        | Weight |
|-------|----------------------------------|--------------|--------|
| 00460 | SP-Anchor                        | Any          | 2.00   |
| 00480 | WA-Anchor (fasteners included)   | 7/12         | 0.80   |
| 00481 | WA-Anchor (fasteners included)   | 7/12 – 12/12 | 1.00   |
| 00482 | Halo Anchor (fasteners included) | Any          | 0.80   |



00460



WA-Anchor

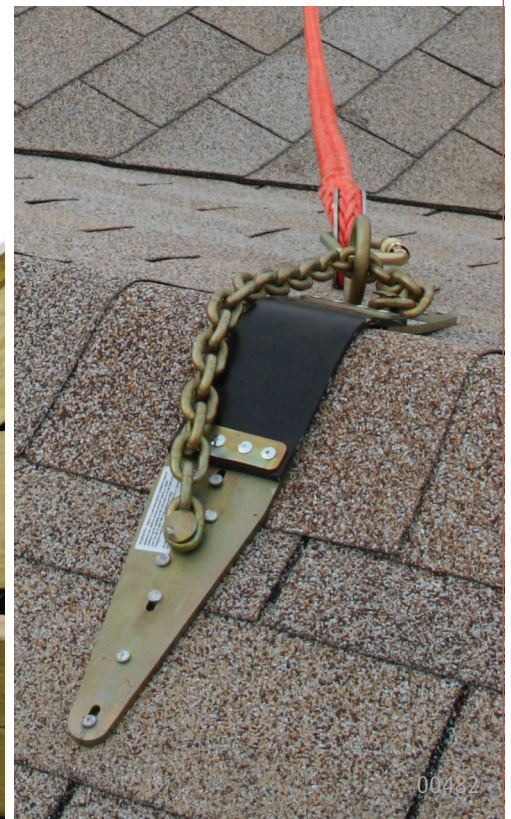

00482

### SP-Anchor (00460) ↘

- Fits any pitch
- Disposable
- Easy to install by nailing or screwing into the truss
- Screws are included
- Meets all applicable OSHA & ANSI standards
- Durable galvanized steel

### WA-Anchor ↘

- Can be left in place or removed from service after construction is complete
- Attaches by drilling through the top chord & securing to the wall plate using four (4) 16d sinkers
- Provides safe vertical anchorage access when performing siding/external wall constructions
- Cost effective and versatile
- Attaches to 2 x 4 & 2 x 6 top plates
- Supplied with all necessary fasteners
- Used as fall arrest or fall restraint

### Halo Anchor (00482) ↘

- Reusable ¼" thick steel roof anchor
- Complete with zinc plated forged alloy steel O-ring
- Nail or bolt into the roof member
- Removable, it may be used again after an inspection
- 5,000 lb. minimum breaking strength
- Supplied with all necessary fasteners
- Used as fall arrest or fall restraint
- May also be used in conjunction with temporary Rope HLL (page 138)