


Workman™ Construction Harness Product Specifications

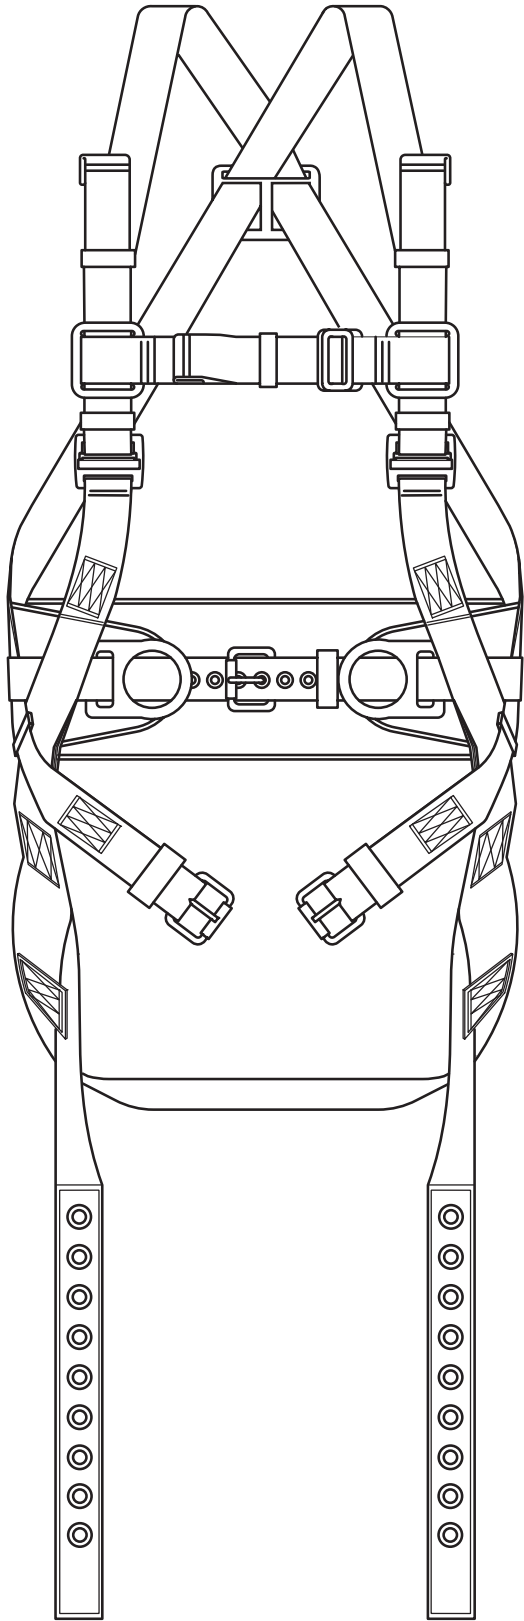

MATERIALS

Web:	1 3/4" (44 mm) nominal width, Polyester
D-Ring:	2 3/16" (56 mm) nominal width Zinc-plated, stamped-alloy steel
Hardware:	Zinc-plated, stamped-alloy steel
Thread:	Polyester Box stitches: 3 cord thread
Plastic Parts:	PVC
Labels:	Valeron, NRV
Back Pad:	Opencell, thermoplastic foam with cordura laminate
Shoulder Pad:	Polyurethane foam

TECHNICAL

Web Minimum Breaking Strength:	6,000 pounds
D-Ring Minimum Breaking Strength:	5,000 pounds Proof-tested to 3,600 pounds
Maximum Capacity	400 pounds (181 kg)

CERTIFICATION

OSHA:	All applicable standards including 1910.66 and 1926.502
ANSI:	A10.32 and Z359.1